



DATASHEET - March 31, 2008

Introduction

The Probe100 passive oscilloscope probes feature a one piece (monolithic) design for long life. Features excellent frequency response with high system impedance to be virtually transparent for your test setup. Includes a complete set of accessories accommodate a variety of measurement configurations.

Accessory Pack Includes

- ▶ Ground spring (1).
- ▶ Ground lead 12cm (1).
- ▶ Retractable hook tip (1).
- ▶ Insulating cap (1).
- ▶ IC insulating cap (1).
- ▶ Trimmer tool (1).
- ▶ Color ring (2).
- ▶ Probe tip (1).

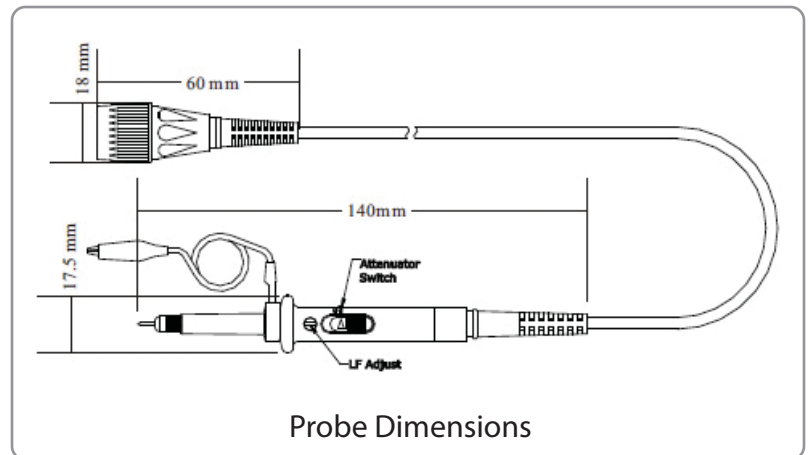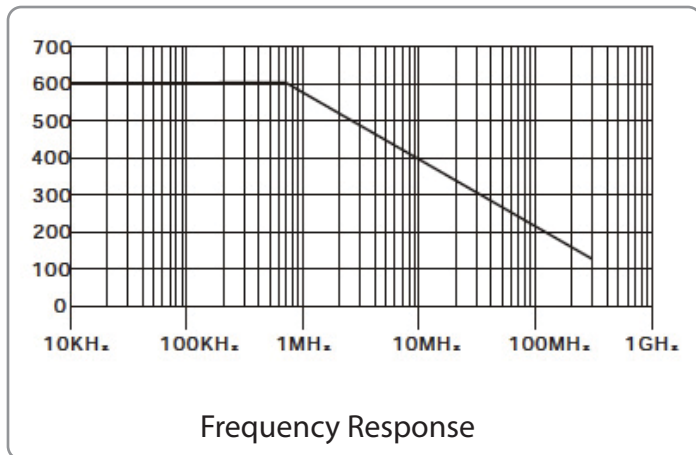

◀ ELECTRICAL SPECIFICATIONS ▶

Attenuation	Bandwidth (MHz)	Rise-Time (ns)	Compensation (pF)	Max Voltage (V)	Input Capacitance (pF)	GND REF
x1 / x10	15 / 100	23.3 / 3.5	10 - 60	600	57 / 15	✓